

# Assembly Instruction Sheet #S-1212P8 For Style 1212P8

**Tools Required:** Flathead screwdriver, Philips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.


**Light Source:** (1) SUGGESTED LED G9 BALLBULB GW (Not Included).  
**Individual Assembly Time:** 15-30 minutes.  
**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams before to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### ⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

### Package Contents

- B Middle Rod
- B1 4" 2pcs
- B2 6" 1pcs
- B3 12" 5pcs

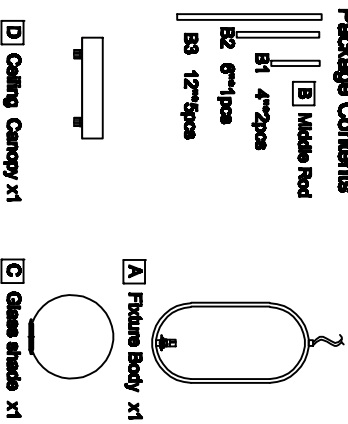


### STEP 1 - Install Rods to Fixture Body

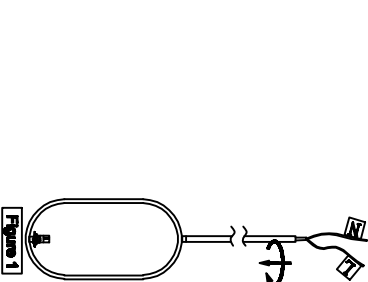


### Hardware Contents

PART	DESCRIPTION	QUANTITY
B3	Wire nut	2pcs
CC	Outlet Box Cover	2pcs
B3	Wire nut	2pcs
CC	Outlet Box Cover	2pcs

### STEP 2 - Release Crossbar from Ceiling Canopy.




### STEP 3 - Install Ceiling Canopy to Rod

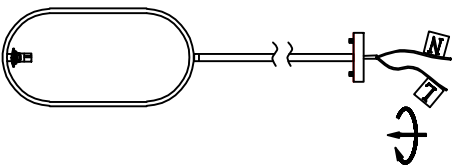


### STEP 5 - Wire Connections

Also standard wire connections to make all wire connections. Twist connectors until wires are fully joined together. Wrap each connection with approved electrical tape and carefully snip at the connected wires into the Outlet Box.

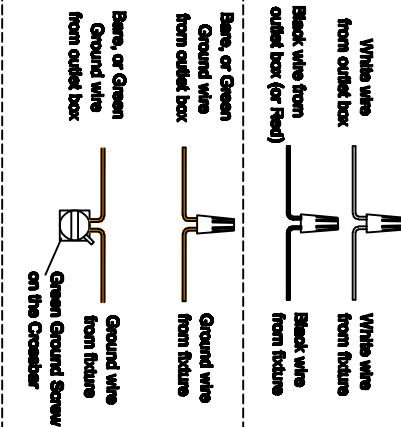

### STEP 4 - Attach Crossbar to Outlet Box.

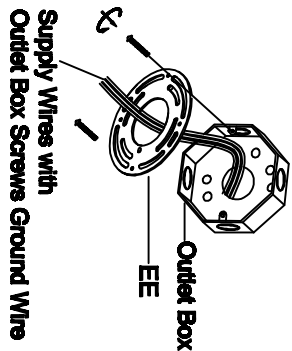

### STEP 6 - Install bulb and Glass Shade.

