

Assembly Instruction Sheet #S-1223P12 For Style 1223P12


Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (5) E12 Bulb 60W Maximum (Not Included).
Estimated Assembly Time: 15-30 minutes.
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams before to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
 These instructions are provided for your safety. It is very important you read them completely before installing the fixture.
 We strongly recommend that a licensed, professional electrician perform the installation.
 Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents



PART	DESCRIPTION	QUANTITY
AA	Decorative Cap	2pc
BB	Mounting Bracket	2pc
CC	Outlet Box	2pc
DD	Mounting Screw	2pc
EE	Mounting Nut	2pc
FF	Lock Washer	2pc
GG	Thread Mounting Screw	2pc
HH	Decorative Cap	2pc
II	Decorative Cap	2pc
JJ	Decorative Cap	2pc
KK	Decorative Cap	2pc
LL	Decorative Cap	2pc
MM	Decorative Cap	2pc
NN	Decorative Cap	2pc
OO	Decorative Cap	2pc
PP	Decorative Cap	2pc
QQ	Decorative Cap	2pc
RR	Decorative Cap	2pc
SS	Decorative Cap	2pc
TT	Decorative Cap	2pc
UU	Decorative Cap	2pc
VV	Decorative Cap	2pc
WW	Decorative Cap	2pc
XX	Decorative Cap	2pc
YY	Decorative Cap	2pc
ZZ	Decorative Cap	2pc

STEP 1 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting Bracket.
 A. Line up a set of holes on the Mounting bracket(EE) and Holes on the Backplate. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Push Lock Nuts onto the Mounting Screws (DD). Hand tighten until snug.

Figure 1

STEP 2 - Attach Mounting Bracket to Outlet Box.
 A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.




Figure 2

STEP 3 - Fit Backplate to Mounting Bracket Assembly.
 A. Fit the backplate to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The backplate should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the Ceiling Canopy is secure, remove the Decorative Caps (AA) and Ceiling Canopy and proceed to step 4.

Figure 3

STEP 4 - Wire Connections
 A. Use standard wire connectors to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

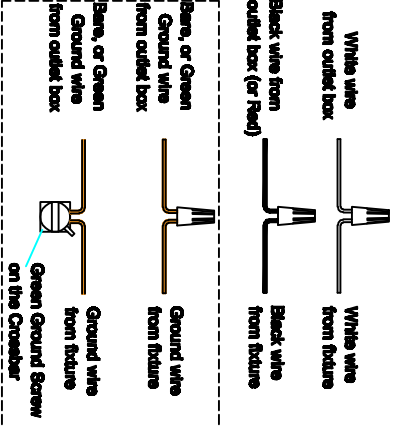


Figure 4

STEP 5 - Install Ceiling Canopy to Ceiling.
 A. Carefully tuck all wires into the outlet box and position the Ceiling Canopy of the Fixture Body (AA) over the outlet box. Align the holes in the Ceiling Canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.




Figure 5

STEP 6 - Install Bulbs.
 A. Install bulbs (Not Included) into sockets and push snug into place.




Figure 6