
















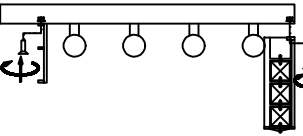



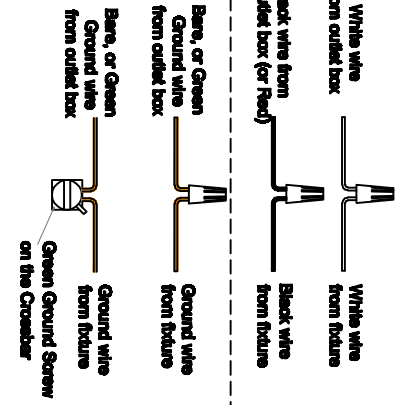
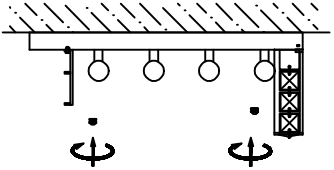
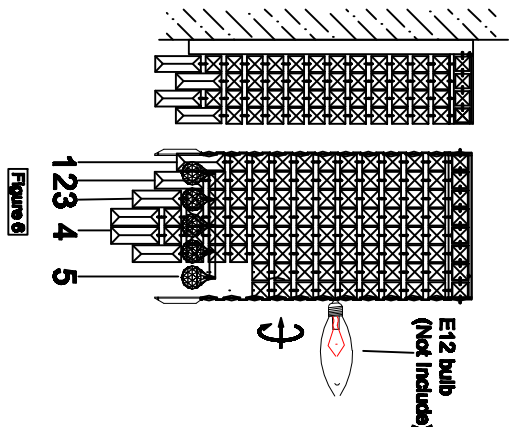



# Assembly Instruction Sheet #IS-8031W7C For Style 8031W7C

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.  
**Light Source:** (4) E12 Base Bulb (GVV Maximum (not included)).  
**Estimated Assembly Time:** 30-40 minutes.  
**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, handle or operate the fixture. Contact customer service for replacement parts.

**Warnings and Cautions**  
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

<p><b>Package Contents</b></p> <p><b>A</b> Fixture Body x1  </p> <p><b>B</b> Metal frame x1  </p> <p><b>C</b> Metal frame x1  </p>	<p><b>STEP 1 - Release Crossbar from Ceiling Canopy .</b></p>  <p><b>Figure 1</b></p>						
<p>22mm*10PCS   22mm*11PCS   63mm*1PCS   63mm*1PCS   22mm*12PCS   63mm*1PCS   63mm*1PCS   22mm*13PCS   63mm*1PCS   22mm*14PCS   63mm*1PCS   22mm*15PCS   63mm*1PCS  </p>	<p><b>STEP 2 - Install Metal frame to Fixture Body</b></p>  <p><b>Figure 2</b></p>						
<p><b>Hardware Contents</b></p> <table border="1"> <thead> <tr> <th>PART DESCRIPTION</th> <th>QUANTITY</th> </tr> </thead> <tbody> <tr> <td>B8 Electrical Nuts</td> <td>2pcs</td> </tr> <tr> <td>CC Outlet Box Screw</td> <td>2pcs</td> </tr> </tbody> </table> <p> </p>	PART DESCRIPTION	QUANTITY	B8 Electrical Nuts	2pcs	CC Outlet Box Screw	2pcs	<p><b>STEP 3 - Attach Crossbar to Outlet Box</b></p> <p><b>A</b> Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box (CC) with the head of the Green Ground Screw (not included). Secure it with Outlet Box Screws (not included). Tighten until snug.</p>  <p><b>Figure 3</b></p>
PART DESCRIPTION	QUANTITY						
B8 Electrical Nuts	2pcs						
CC Outlet Box Screw	2pcs						
<p><b>STEP 4 - Wire Connections</b></p> <p><b>A</b> Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.</p>  <p><b>Figure 4</b></p>	<p><b>STEP 5 - Install Backplate to wall</b></p>  <p><b>Figure 5</b></p>						
<p><b>STEP 6 - Install bulb And Crystal .</b></p>  <p><b>Figure 6</b></p>	<p><b>STEP 7 - Final Assembly</b></p>  <p><b>Figure 7</b></p>						