

STEP 2 - Install the Fixture Chain and Ceiling Canopy

- A. Adjust the fixture chain to your desired length by removing links if needed.
- B. Pull the supply wires through the fixture chain ~~alternating~~ links. After the wires are through the fixture chain, pull the supply wires and the ground wire through the canopy lock ring and the ceiling canopy in order.
- C. Attach one end of the fixture chain to the fixture loop with one quick link. Lift the fixture and fixture chain up and attach the other end of the fixture chain onto the canopy chain loop with another quick link. The fixture will now hang safely.
- D. Feed the supply wires and ground wire through the canopy chain loop and nipple into the outlet box. Cut the wires leaving approximately 8" of wire extending from the outlet box.
- E. Go to Step 4 for wire connections and follow the directions. Return to Step 3 in this step when complete with Step 3.
- F. Raise the ceiling canopy and canopy lock ring up the fixture chain and over the canopy chain loop until tight.

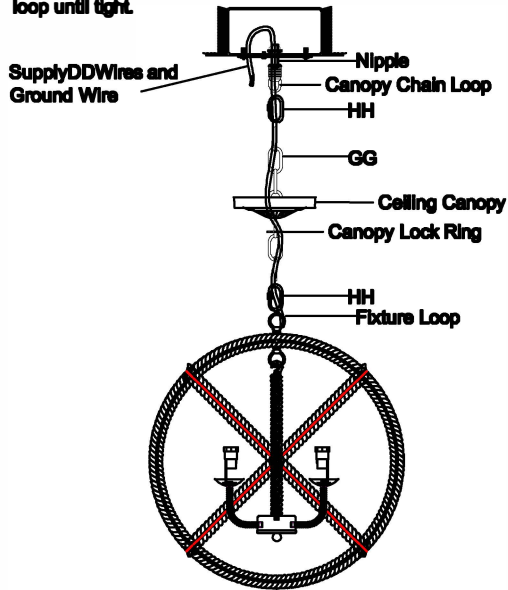


Figure 2

STEP 4 - Install Bulbs and Socket sleeve .

- A. Place Socket sleeve over sockets as shown.
- B. Install bulbs onto sockets and push snugly into place.

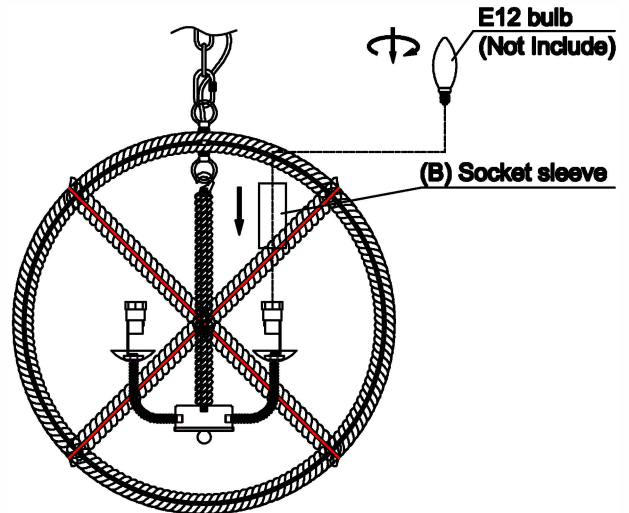


Figure 4

STEP 3 - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

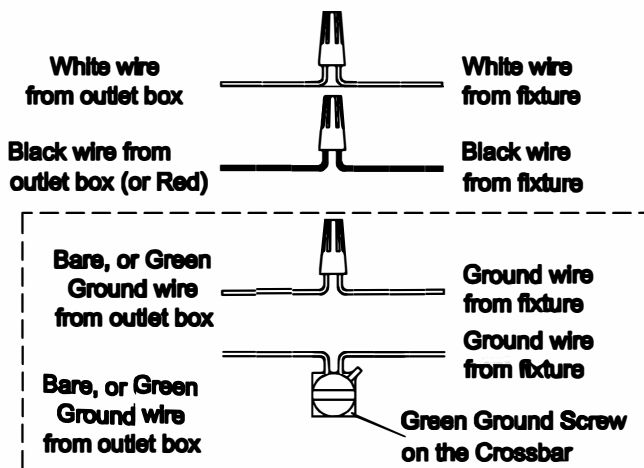


Figure 3