


Assembly Instruction Sheet #HS-QS8353P20C For Style QS8353P20C

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (9) G9 Candelabra Base Bulbs 40W Medium(Bulb Not Include).
Estimated Assembly Time: 20-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

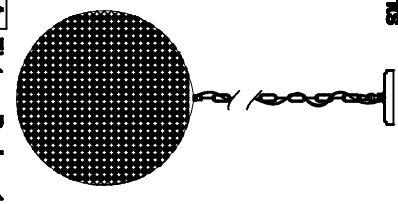

A Fixture Body x1

PART	DESCRIPTION	QUANTITY
BB	Wire Nut	2pcs
EE	Outlet Box Screw	2pcs

Hardware Contents

STEP 1 - Install the Canopy Chain Loop and Nipple

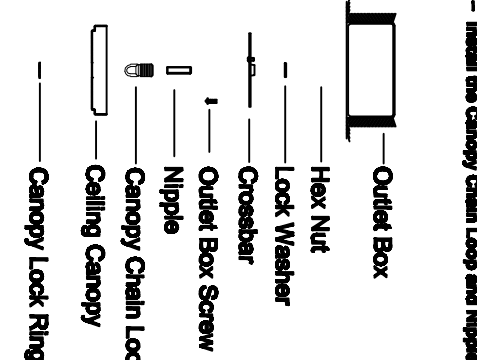


Figure 1

STEP 2 - Install the Fixture Chain and Ceiling Canopy

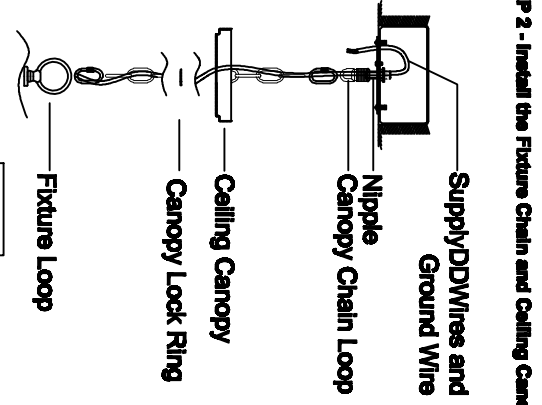


Figure 2

STEP 3 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

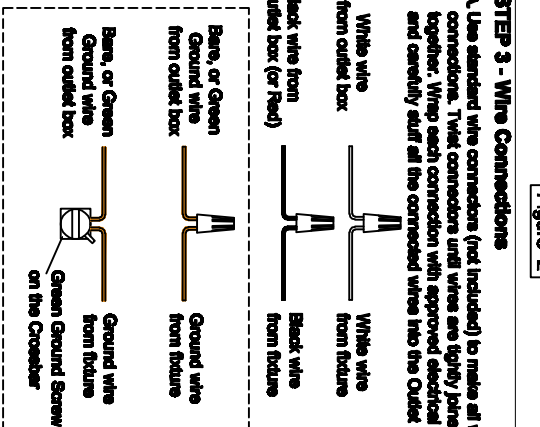


Figure 3

STEP 4 - Install Bulbs.

A. Loosen the screw on door in the middle of the Fixture Body.
 B. Install bulbs onto sockets and push snug into place.
 C. Install back the Lock Screw back as it is.

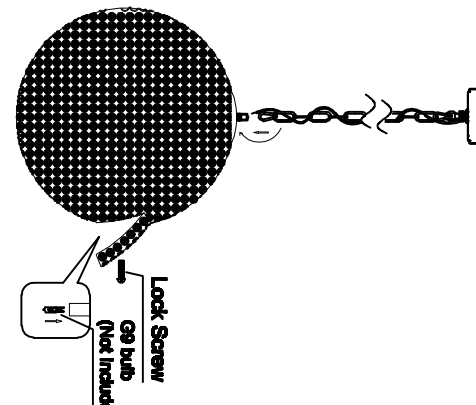


Figure 4